


Detector Switch One-way Operation Type

SPVC1 Series



Push type detector switch applicable to two types of circuit variations; Normal ON and Normal Close.

- Detector
- Push
- Slide
- Rotary
- Encoders
- Power

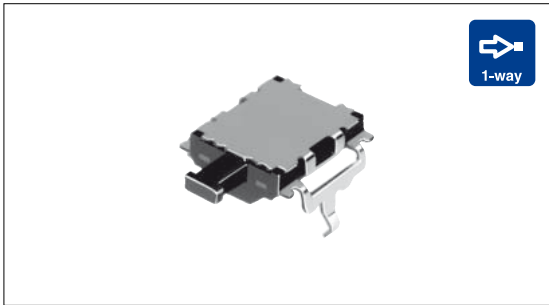

Typical Specifications


Items		Specifications
Rating (max.) / (min.) (Resistive load)		10mA 16V DC/50 BA 3V DC
Contact resistance (Initial /After operating life)		1 Ω max./2 Ω max.
Operating force		0.85N max.
Operating life	Without load	25,000cycles
	With load	25,000cycles (10mA 16V DC)

- Dual-in-line
Package Type
- TACT Switch™
- Custom-
Products


Product Line

Poles	Positions	Terminal type	Circuit arrangement	Minimum order unit (pcs)	Product No.
1	1	Snap-in	Push ON	12,500	SPVC110300
			Push OFF		SPVC110100

Dimensions

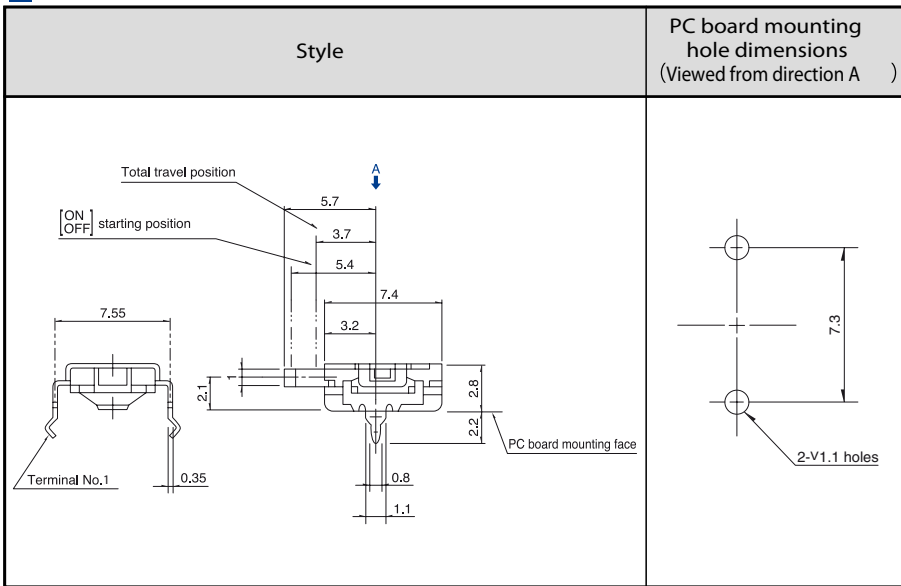

Circuit Diagram

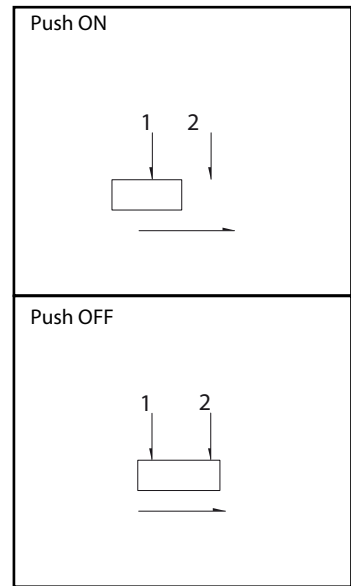

Note

Please place purchase orders per minimum order unit(integer).

Tel.: + 49 89 899797-64
 Fax: + 49 89 899797-65
 Email: info@dst-gmbh.de
 Internet: www.dst-gmbh.de